



FORM MEETS PERFORMANCE.

ARCHIMAT ENTRANCE SYSTEM



BUILT TO PERFORM.

ARCHIMAT is a specification grade entrance system built for commercial, residential, and building projects where durability, traffic performance, and material reliability are essential.

Suitable for entrance and transition zones subject to continuous pedestrian traffic, ARCHIMAT provides a stable, low maintenance surface solution designed for longevity in demanding environments.


ARCHIMAT ensures consistency in finish, dimensional accuracy and performance. The Mat Group can also tailor any area matting with ARCHIMAT inserts, ensuring a cohesive presentation throughout your building or space.




RECOMMENDED INSERT COLOURS




CHARCOAL



BLACK



MID GREY




CAMEL



DENIM



STERLING



PLY RUBBER



COIR

PERFORMANCE

ARCHIMAT is designed for entrance environments subject to continuous pedestrian movement, where surface stability, durability, and long term reliability are critical.

Typically specified in retail, transport, education, healthcare, and multi residential developments.

Implemented where entrance systems are required to manage sustained traffic, integrate with architectural finishes, and reduce ongoing maintenance requirements.

KEY BENEFITS

- Aluminium scraper treads remove large debris while inserts offer greater moisture absorption
- 10 year material warranty* when installed and maintained per The Mat Group's requirements
- Clean, professional entryway
- Acoustic performance - integrated backing reduces footfall and rolled traffic noise in high use entries
- Specified for commercial and high end residential buildings
- Customisable finishes with a range of inserts and colours to suit any interior
- Made to order, customisable sizes to suit any entrance configuration

MAINTENANCE & CARE

EVERYDAY CARE

- Sweep or vacuum daily to remove grit before it causes wear
- Spot clean spills promptly with a damp cloth to stop stains setting in

DEEP CLEAN ROUTINE

1. Vacuum thoroughly to remove loose dirt
2. Clean with mild soap or neutral pH solution, avoiding harsh chemicals whilst following manufacturer's instructions
3. Scrub gently with a soft brush, avoiding abrasion
4. Rinse, dry fully before foot traffic resumes

ONGOING PERFORMANCE & SAFETY

- Inspect for wear and repair early
- Schedule professional cleaning for high traffic areas
- Keep matting flat and secure, with edges flush to the floor
- Well maintained matting performs better and lasts longer



PRODUCT SPECIFICATIONS

The following specification summary outlines the system parameters for ARCHIMAT, providing a clear reference for documentation, detailing and project coordination. The system is available in standard and project specific options to suit a range of entrance applications.

USES	High Traffic Recess Areas
MATERIALS	Heavy gauge aluminium hinged strips/tread rails, perforated, Alloy 6063-T6 anodised
THICKNESS	12mm
EDGING	Framed / Recessed
COLOUR	Aluminium Rails in Silver or Black



SCAN TO EXPLORE
ARCHIMAT RESOURCES




COMPLIANCE

ARCHIMAT has been independently tested in accordance with relevant Australian standards for slip resistance and reaction to fire, including AS 4586 and AS ISO 9239.1. These results support specification in commercial and public buildings where compliance with safety performance requirements is required.

INSTALLATION & APPLICATION

RECESSED

Frame sits flush within matwell recess

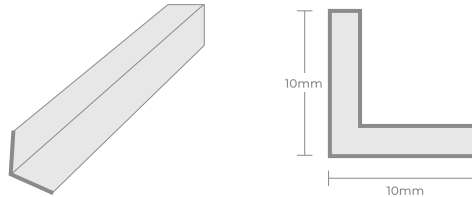

FRAMED

Ramped edge sits on top of existing floor

